


| | | |
|-----------------|------------------|-----------|
| Revision Number | Approved | Date |
| 1 | Kefalidis Pavlos | 10/1/2020 |



| Flammability Glass | Material | Colour | Cable Range (mm) | A | B | D | E | G | H | Min Loop Tensile Strength |
|--------------------|----------|----------|------------------|-----------|-----------|-----------|-----------|-----------|-----------|---------------------------|
| V2 acc. to UL 94 | PA-66 | Natural | mim. 3,7 | 1.11 ±0.2 | 2.55 ±0.2 | 3.47 ±0.3 | 4.70 ±0.5 | 80.0 ±5.0 | 5.32 ±0.5 | 80 N 8 Kg. |
| | PA-66 | Black | max. 14 | | | | | | | |
| | PA66UV | Black UV | | | | | | | | |
| | PA-66 | Colored | | | | | | | | |

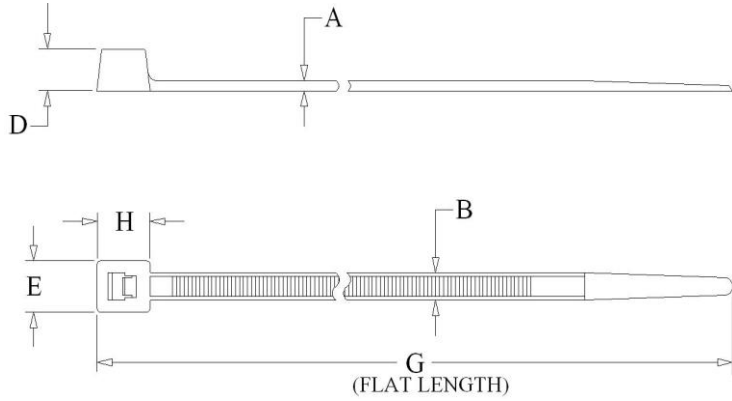

| | | | | | | |
|--|----------|-----------------------------------|---|------|---------------------------|-----------|
| CODE | Standard | Packing | Scale | 2:01 | Computer File Number | ACT 08025 |
| 03-001 Natural 03-201 Black Standard 03-801 Black UV 03-301 Red 03-401 Yellow 03-501 Green 03-601 Blue | | 100pcs. / Bag 12.000pcs. / Box | ArtePlastCableTies Industrial Area Florina 53100 GREECE Ph: +30 2385041300 E-mail: info@arteplast.eu | | | |
| Operating Temperature | | - 25 °C + 85 °C | | | | |
| | | | Title | | 80mm x 2,5mm CABLE TIE | |
| | | | Drawing - No | | Format | |
| | | | ACT 3001234568 | | A4 | |
| | | | | | Sheet 1 of 1 | |