


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.11 ±0.2	2.55 ±0.2	3.47 ±0.3	4.70 ±0.5	120.0 ±5.0	5.32 ±0.5	80 N 8 Kg.
	PA-66	Black	max. 30							
	PA66UV	Black UV								
	PA-66	Colored								

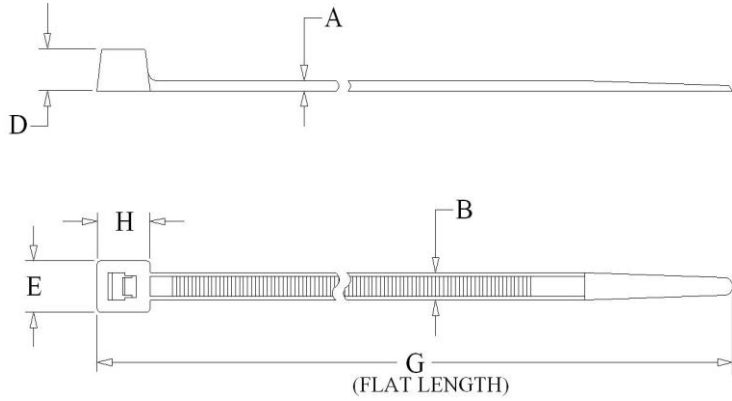

CODE	Standard	Packing	Scale	2:01	Computer File Number	ACT 12025
03-003 Natural 03-203 Black Standard 03-803 Black UV 03-303 Red 03-403 Yellow 03-503 Green 03-603 Blue		100pcs. / Bag 12.000pcs. / Box	<b>ArtePlast</b> CableTies  Industrial Area Florina 53100 GREECE Ph: +30 2385041300 E-mail: info@arteplast.eu			
Operating Temperature		- 25 °C + 85 °C				
			Title		120mm x 2,5mm CABLE TIE	
			Drawing - No		Format	
			<b>ACT 3003234568</b>		A4	
					Sheet 1 of 1	