


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.50 ±0.2	7.59 ±0.2	6.27 ±0.3	10.27 ±0.5	151.0 ±5.0	8.73 ±0.5	550 N 55 Kg.
	PA-66	Black	max. 40							
	PA66UV	Black UV								
	PA-66	Colored								

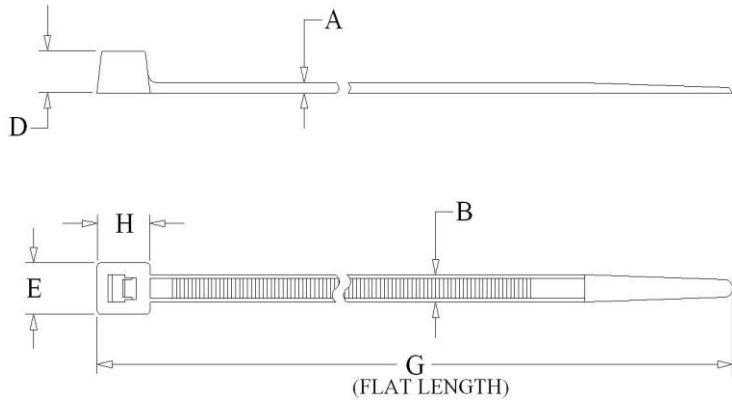

CODE	Standard	Packing	Scale	2:01	Computer File Number	ACT 15076
03-030 Natural 03-230 Black Standard 03-830 Black UV 03-330 Red 03-430 Yellow 03-530 Green 03-630 Blue		100pcs. / Bag 2.000pcs. / Box	ArtePlastCableTies Industrial Area Florina 53100 GREECE Ph: +30 2385041300 E-mail: info@arteplast.eu			
Operating Temperature		- 25 °C + 85 °C				
			Title		150mm x 7,6mm CABLE TIE	
			Drawing - No		Format	
			ACT 3030234568		A4	
					Sheet 1 of 1	