


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.44 ±0.2	4.81 ±0.2	6.22 ±0.3	7.80 ±0.5	159.0 ±5.0	7.83 ±0.5	220 N 22 Kg.
	PA-66	Black	max. 42							
	PA66UV	Black UV								
	PA-66	Colored								

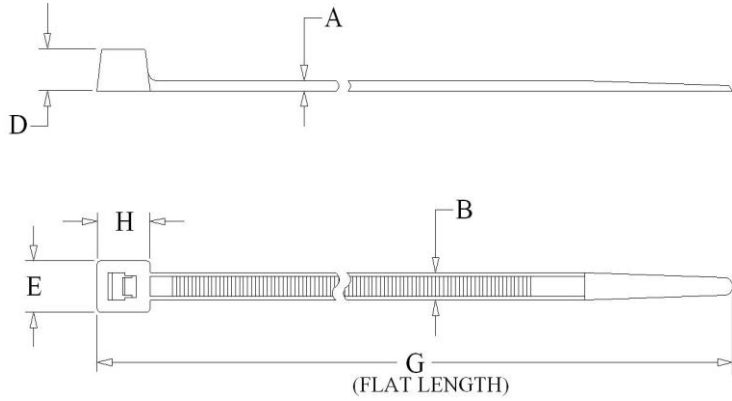

CODE	Standard	Packing	Scale	2:01	Computer File Number	ACT 16048
03-021 Natural 03-221 Black Standard 03-821 Black UV 03-321 Red 03-421 Yellow 03-521 Green 03-621 Blue		100pcs. / Bag 3.500pcs. / Box	ArtePlastCableTies Industrial Area Florina 53100 GREECE Ph: +30 2385041300 E-mail: info@arteplast.eu			
Operating Temperature						
- 40 °C + 85 °C			Title		160mm x 4,8mm CABLE TIE	
			Drawing - No		Format	
			ACT 3021234568		A4	
					Sheet 1 of 1	