


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.35 ±0.2	3.64 ±0.2	4.45 ±0.3	6.33 ±0.5	183.0 ±5.0	6.39 ±0.5	180 N 18 Kg.
	PA-66	Black	max. 49							
	PA66UV	Black UV								
	PA-66	Colored								

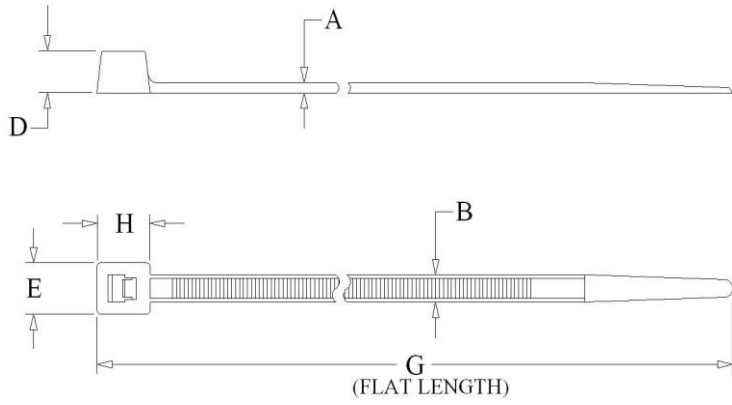

CODE	Standard	Packing	Scale	2:01	Computer File Number	ACT 18036	
03-011 Natural 03-211 Black Standard 03-811 Black UV 03-311 Red 03-411 Yellow 03-511 Green 03-611 Blue	100pcs. / Bag 5.000pcs. / Box	<p align="center">ArtePlastCableTies</p> <p>Industrial Area Florina 53100 GREECE Ph: +30 2385041300 E-mail: info@arteplast.eu</p>	Title				180mm x 3,6mm CABLE TIE
Operating Temperature	Drawing - No		Format		A4		
- 25 °C + 85 °C	ACT 3011234568		Sheet 1 of 1				