


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.44 ±0.2	4.81 ±0.2	6.22 ±0.3	7.80 ±0.5	200.0 ±5.0	7.83 ±0.5	220 N 22 Kg.
	PA-66	Black	max. 52							
	PA66UV	Black UV								
	PA-66	Colored								

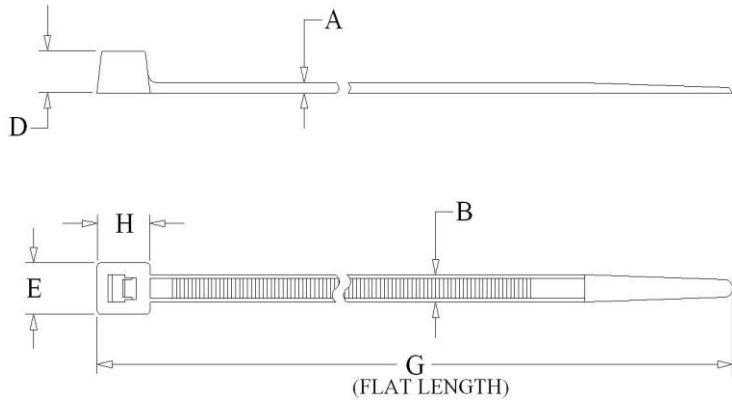

<b>CODE</b>
03-022 Natural 03-222 Black Standard 03-822 Black UV 03-322 Red 03-422 Yellow 03-522 Green 03-622 Blue
<b>Operating Temperature</b>
- 40 °C + 85 °C

<b>Standard</b>	<b>Packing</b>
	100pcs. / Bag 2.500pcs. / Box

**ArtePlast**CableTies

Industrial Area Florina  
53100 GREECE  
Ph: +30 2385041300  
E-mail: info@arteplast.eu

<b>Scale</b>	2:01	<b>Computer File Number</b>	ACT 20048
<b>Title</b>			
200mm x 4,8mm CABLE TIE			
<b>Drawing - No</b>			<b>Format</b>
<b>ACT 3022234568</b>			A4
Sheet 1 of 1			