


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.44 ±0.2	4.81 ±0.2	6.22 ±0.3	7.80 ±0.5	300.0 ±5.0	7.83 ±0.5	220 N 22 Kg.
	PA-66	Black	max. 85							
	PA66UV	Black UV								
	PA-66	Colored								

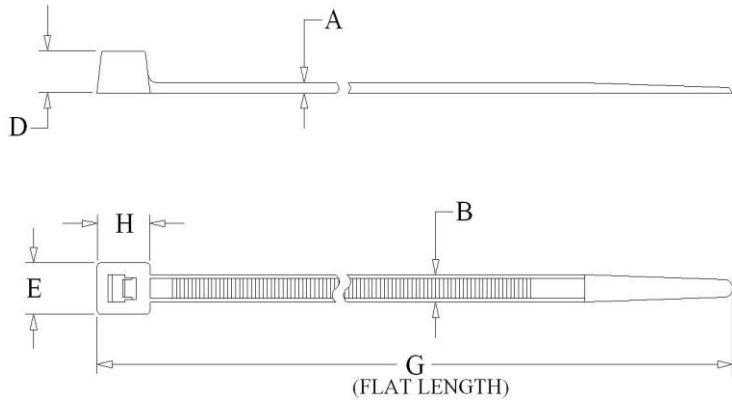

CODE
03-024 Natural 03-224 Black Standard 03-824 Black UV 03-324 Red 03-424 Yellow 03-524Green 03-624 Blue
Operating Temperature
- 40 °C + 85 °C

Standard	Packing
	100pcs. / Bag 2.000pcs. / Box

ArtePlastCableTies

Industrial Area Florina
53100 GREECE
Ph: +30 2385041300
E-mail: info@arteplast.eu

Scale	2:01	Computer File Number	ACT 30048
Title			
300mm x 4,8mm CABLE TIE			
Drawing - No			Format
ACT 3024234568			A4
Sheet 1 of 1			