


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.50 ±0.2	7.59 ±0.2	6.27 ±0.3	10.27 ±0.5	301.0 ±5.0	8.73 ±0.5	550 N 55 Kg.
	PA-66	Black	max. 85							
	PA66UV	Black UV								
	PA-66	Colored								

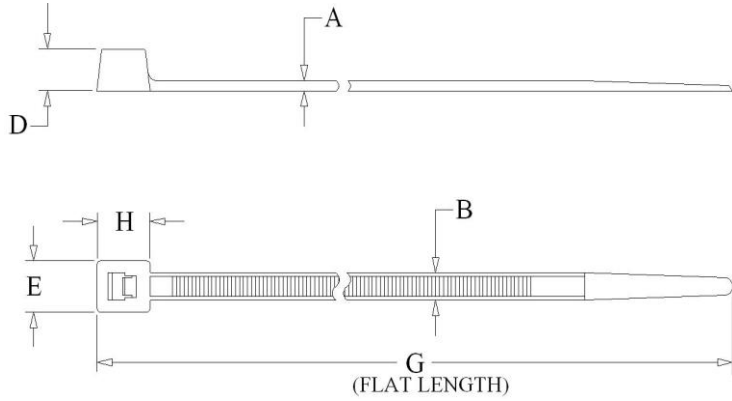

CODE	Standard	Packing	Scale	2:01	Computer File Number	ACT 30076	
03-032 Natural 03-232 Black Standard 03-832 Black UV 03-332 Red 03-432 Yellow 03-532 Green 03-632 Blue	100pcs. / Bag 1.500pcs. / Box	ArtePlast CableTies Industrial Area Florina 53100 GREECE c E-mail: info@arteplast.eu	Title				300mm x 7,6mm CABLE TIE
Operating Temperature	Drawing - No			Format			
- 25 °C + 85 °C	ACT 3032234568			A4			
Sheet 1 of 1							