


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	min. 25	1.44 ±0.2	4.81 ±0.2	6.22 ±0.3	7.80 ±0.5	369.0 ±5.0	7.83 ±0.5	220 N 22 Kg.
	PA-66	Black	max. 103							
	PA66UV	Black UV								
	PA-66	Colored								

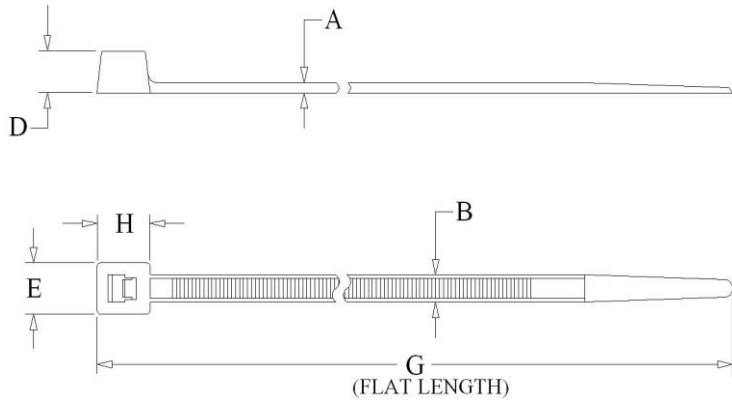

CODE	Standard	Packing	Scale	2:01	Computer File Number	ACT 37048
03-025 Natural 03-225 Black Standard 03-825 Black UV 03-325 Red 03-425 Yellow 03-525 Green 03-625 Blue		100pcs. / Bag 1.500pcs. / Box	<b>ArtePlastCableTies</b>  Industrial Area Florina 53100 GREECE Ph: +30 2385041300 E-mail: info@arteplast.eu			
Operating Temperature						
- 40 °C + 85 °C			Title		370mm x 4,8mm CABLE TIE	
			Drawing - No		Format	
			<b>ACT 3025234568</b>		<b>A4</b>	
					Sheet 1 of 1	