


Revision Number	Approved	Date
1	Kefalidis Pavlos	10/1/2020



Flammability Glass	Material	Colour	Cable Range (mm)	A	B	D	E	G	H	Min Loop Tensile Strength
V2 acc. to UL 94	PA-66	Natural	mim. 3,7	1.50 ±0.2	7.59 ±0.2	6.27 ±0.3	10.27 ±0.5	371.0 ±5.0	8.73 ±0.5	550 N 55 Kg.
	PA-66	Black	max. 97							
	PA66UV	Black UV								
	PA-66	Colored								

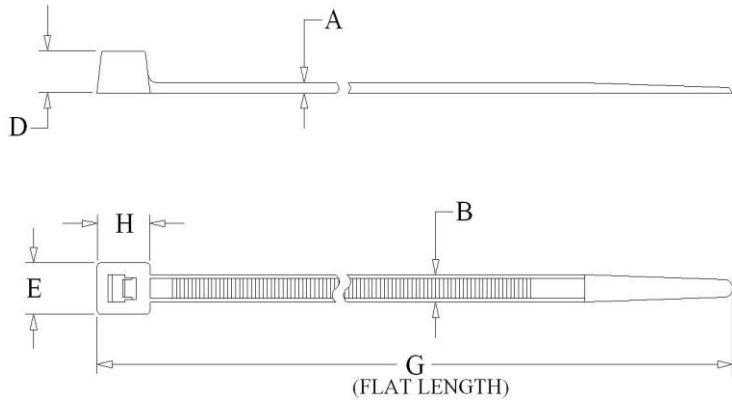

CODE
03-033 Natural 03-233 Black Standard 03-833 Black UV 03-333 Red 03-433 Yellow 03-533 Green 03-633 Blue
Operating Temperature
- 25 °C + 85 °C

Standard	Packing
	100pcs. / Bag 1.200pcs. / Box

ArtePlastCableTies

Industrial Area Florina
53100 GREECE
Ph: +30 2385041300
E-mail: info@arteplast.eu

Scale	2:01	Computer File Number	ACT 37076
Title			
370mm x 7,6mm CABLE TIE			
Drawing - No			Format
ACT 3033234568			A4
Sheet 1 of 1			